


HAMILTON SECURITY PRODUCTS CO.

755 Reading Road • Mason, Ohio 45040 • 513-398-8604


CM2 TO STANDARD TELLER USING IRT-5000 CONTROL BOX

REAR VIEW OF CM2, COVER REMOVED, DOOR OPEN

Switch and bracket are attached to second and third screws from top of door track (side opposite of ribbon cable) using longer screws provided. Adjust so that switch is activated when door is approximately 3" or so from fully open position.

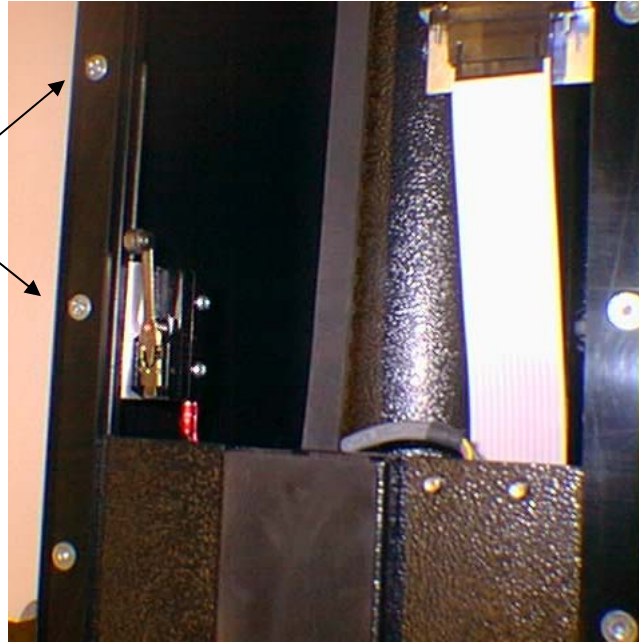

FRONT VIEW CM2, COVER REMOVED

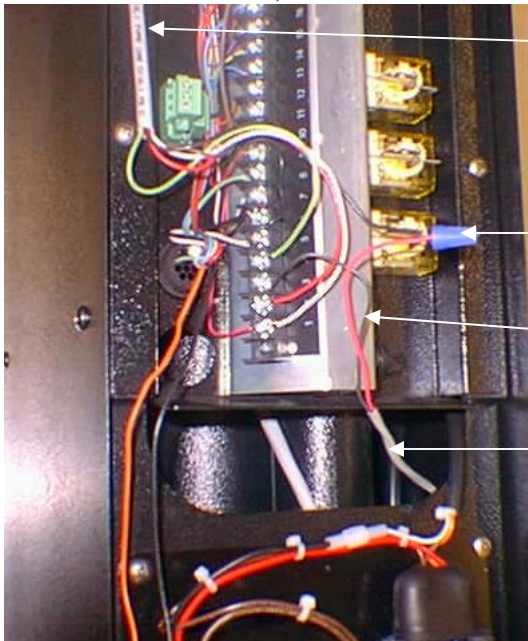

Harness from Control Box
White-#1
Red---#2
Green-#4
Brown-#20

Black to new switch wire

Wire from new switch-
to #3 terminal

New switch harness

IRT-5000

ELECTRICAL CONTROL UNIT

CM2

TELLER UNIT

WHITE T1
RED T2
BLACK T3
GREEN T4
BROWN T5
NOT USED T6

INTERCONNECT CABLE #1

WHITE T1
RED T2
BLACK T4
GREEN T20
BROWN



WHITE T7
RED T8
BLACK T9
GREEN T10
(NOT USED) T11
(NOT USED) T12

INTERCONNECT CABLE #2

T1 WHITE
T2 RED
T3 BLACK
T4 GREEN

STANDARD

TELLER UNIT