


Hamilton Safe Company

80UC Nighthead

Instruction sheet for changing from envelope to bag only operation.


The depository ships from the factory set in the envelope position. This can be changed in the field before installation.

Envelope operation

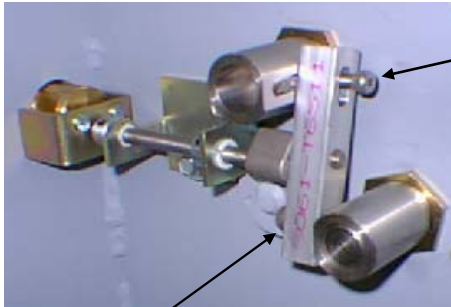

Stationary pivot pin

Bag only operation

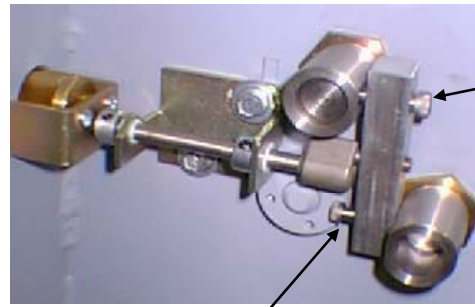

Moving lock pin

Tools required: 1/8" and 5/32" hex wrenches, small flat file, and removable threadlocker.

Step #1: With hex wrenches remove the two shoulder screws from the lock pin and the pivot pin as pictured. Remove both the pins from the sleeves and replace them with the short pivot pin in the top sleeve and long pin in the bottom sleeve. (Note: where the pivot shoulder screw was tightened to the sleeve, you may have to file the slot in the sleeve smooth.)



Step #2: Reinstall the aluminum actuator with the slotted hole to the bottom and the actuator pin positioned it the lock cam. Place a small amount of removable thread locker on the threads of both shoulder screws and reinstall them. (Note: The longer smaller diameter shoulder screw goes with the movable lock pin.) Tighten the lower shoulder screw to the movable lock pin.



Step #3: With the key removed from the lock push the movable lock pin in and pull out the stationary pivot pin and tighten the shoulder screw on the pivot pin. Check the operation of the lock to make sure that when you turn the key to lock position the key will pull straight out easily. If the key will not come out, adjust the pivot pin accordingly for smooth operation and removal of the key.

