

Hamilton Safe Company

98RH Nighthead

Instruction sheet for changing from envelope to bag only operation.

Drawing No: 96-127


The depository ships from the factory set in the envelope position. This can be changed in the field before installation. The lock pin has two tapped holes, the inner hole (hole towards center of depository) is for envelope operation, the outer hole (hole towards the outside of depository) is for bag only operation. By simply changing position of this shoulder screw you change the locking operation.

Tools required: 1/8" hex wrench, and removable threadlocker.

Step #1: With a 1/8" hex wrench remove the 1/4" x 1/2" shoulder screw from the lock pin as pictured.



Do Not loosen or remove the shoulder screw in the top of the lock pin actuator.

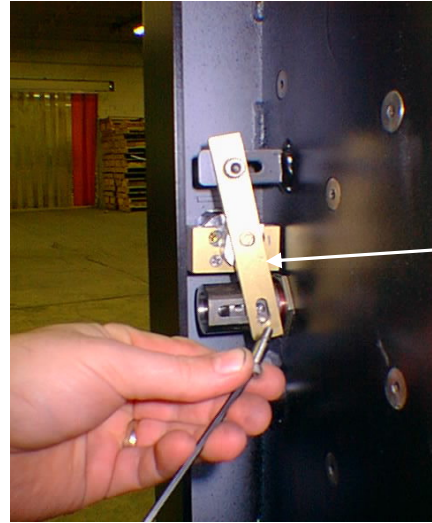

Lock pin actuator

Step #2: Move the lock pin actuator to align the outer hole in lock pin through the slot in actuator. (Note: Key is required to move actuator.) Place a small amount of removable thread locker on the threads of the shoulder screw and tighten it in the outer hole.

