



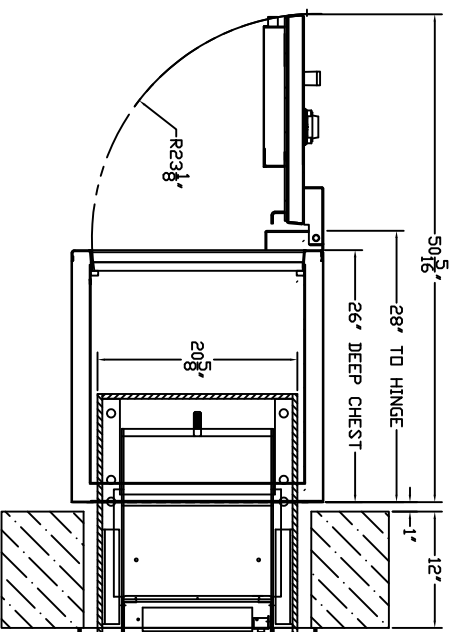


- EQUIPMENT :**
- 1.) 80UC HEAD WITH/5LB PULL ASSIST
 - 2.) SECURE STEEL HOUSING
 - 3.) 24 ADDITIONAL HEAD KEYS
 - 4.) TL-15 COMPOSITE SAFE 29"H x 26"W x 26"D LEFT SWING
 - 5.) TWO ANCHOR HOLES IN SAFE
 - 6.) 35-50 HAMILTON/NL ELECTRONIC DEAD BOLT WITH ONE MANAGERS AND NINE USER TURN TO OPEN
 - 7.) HEAT SENSOR AND DOOR CONTACT
 - 8.) COLOR : CHARCOAL GRAY

IF USING OPTIONAL
FLUORESCENT LIGHT
ELECTRICAL NOTE :
PROVIDE 120V, 60HZ
20 AMP SERVICE

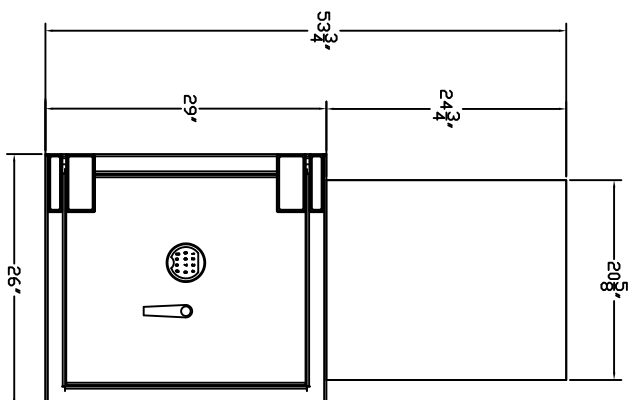


INTERIOR

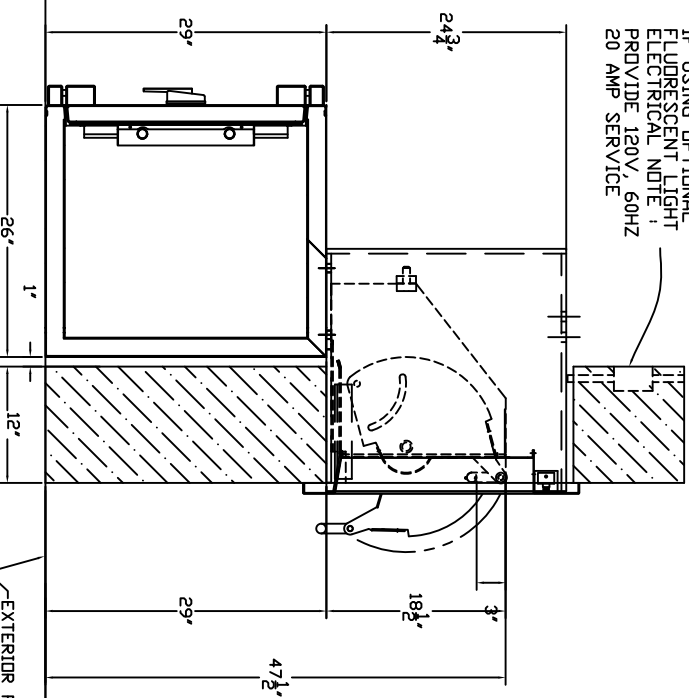

SECTION

EXTERIOR FLOOR ELEVATION

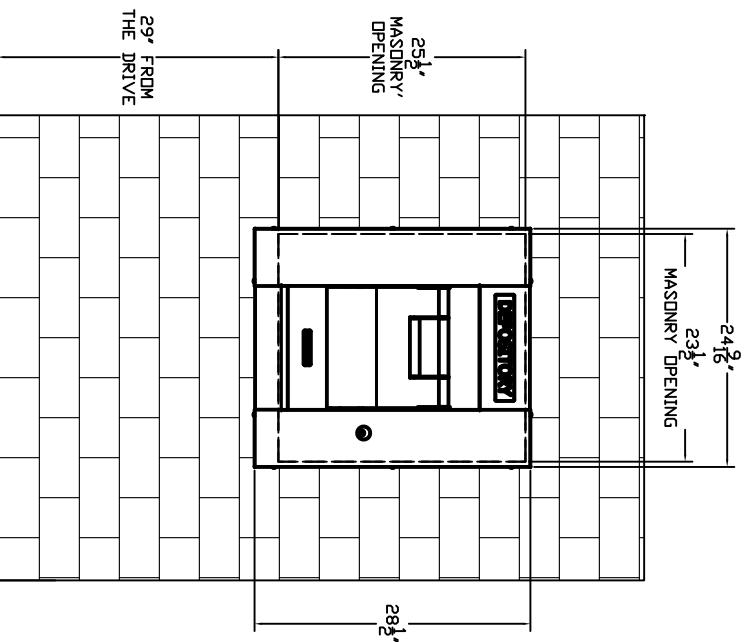

MASONRY DETAIL

ESTIMATED WEIGHT: 1,675LBS.

est. 1967
HAMILTON
CUSTOM MADE SECURITY

PROPRIETARY AND CONFIDENTIAL
THESE DRAWINGS ARE THE PROPERTY
OF HAMILTON SAFE CO. AND SHALL
NOT BE REPRODUCED/COPIED/USED
AS THE BASIS FOR MANUFACTURE OR
SALE OF APPARATUS WITHOUT
PERMISSION

DESCRIPTION
TL-15 Composite Receiving Safe with Secure Housing
29" High x 26"W x 26"D
UL Listed Left Swing Shown

DRAWING/MODEL NUMBER 14-054L DATE 3/4/2021