



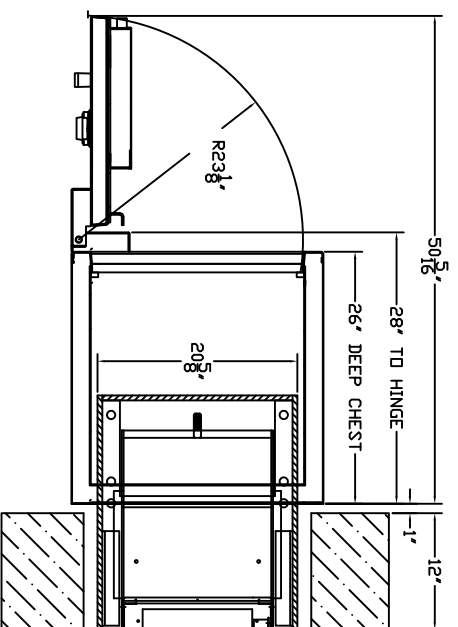


- EQUIPMENT :
- 1.) 80UC HEAD WITH/5LB PULL ASSIST
 - 2.) SECURE STEEL HOUSING
 - 3.) 24 ADDITIONAL HEAD KEYS
 - 4.) TL-15 COMPOSITE SAFE 29"H x 26"W x 26"D RIGHT SWING
 - 5.) TWO ANCHOR HOLES IN SAFE
 - 6.) 35-50 HAMILTON/NL ELECTRONIC DEAD BOLT WITH ONE MANAGERS AND NINE USER TURN TO OPEN
 - 7.) HEAT SENSOR AND DOOR CONTACT
 - 8.) COLOR : CHARCOAL GRAY

IF USING OPTIONAL FLUORESCENT LIGHT ELECTRICAL NOTE: PROVIDE 120V, 60HZ 20 AMP SERVICE

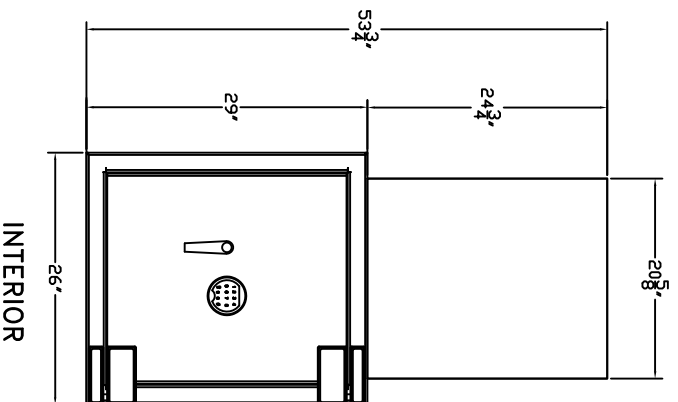


INTERIOR

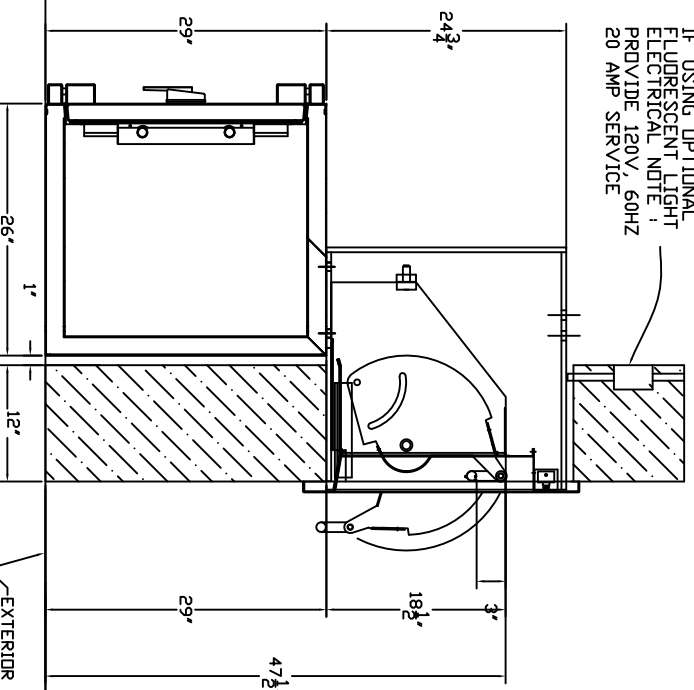

SECTION

EXTERIOR FLOOR ELEVATION

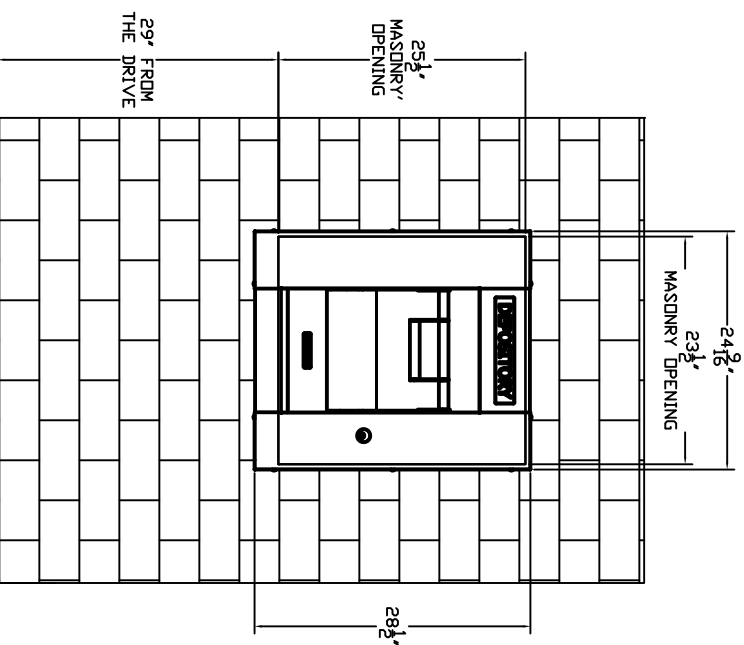

MASONRY DETAIL

ESTIMATED WEIGHT: 1,675LBS.

est. 1967 HAMILTON CUSTOM MADE SECURITY	PROPRIETARY AND CONFIDENTIAL THESE DRAWINGS ARE THE PROPERTY OF HAMILTON SAFE CO. AND SHALL NOT BE REPRODUCED/COPIED/USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION	DESCRIPTION TL-15 Composite Receiving Safe With Secure Housing 29" High x 26"W x 26"D UL Listed Right Swing Shown
DRAWING/MODEL NUMBER 14-054R	DATE 3/4/2021	