


TO SEND CARRIER PROPERLY :

OPEN DOOR AND LIFT CARRIAGE INTO PLACE BY SWINGING
CARRIAGE HOLDER ASSEMBLY BACK ENOUGH SO THAT
CARRIAGE REST ON TOP OF CARRIAGE ARM. CLOSE DOOR
AND SEND CARRIER.

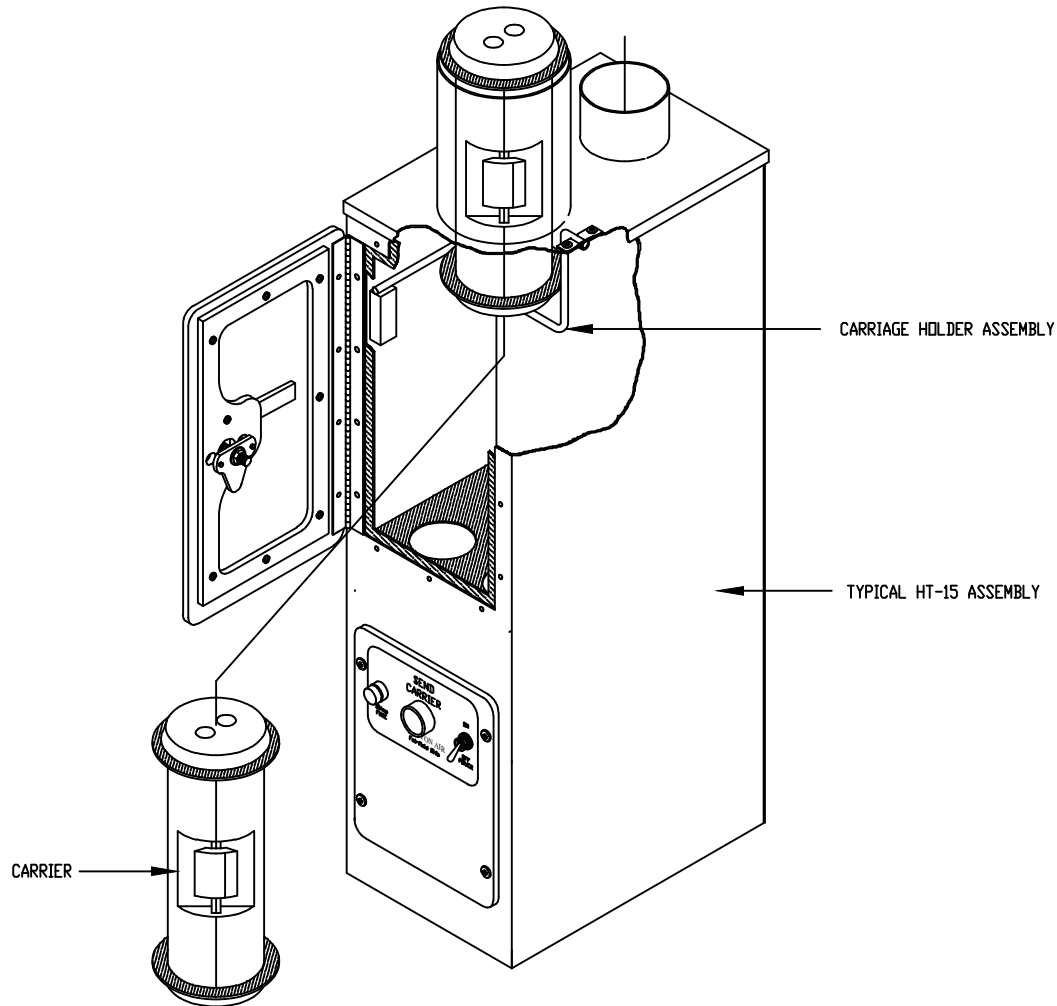

<p>est. 1967</p> <p>HAMILTON</p> <p>CUSTOM MADE SECURITY</p>	<p>PROPRIETARY AND CONFIDENTIAL THESE DRAWINGS ARE THE PROPERTY OF HAMILTON SAFE CO. AND SHALL NOT BE REPRODUCED, COPIED, USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION</p>	DESCRIPTION	
		HT 15 CARRIAGE INSTRUCTIONS	
		DRAWING/MODEL NUMBER	DATE
		99-526	10/08/2021