



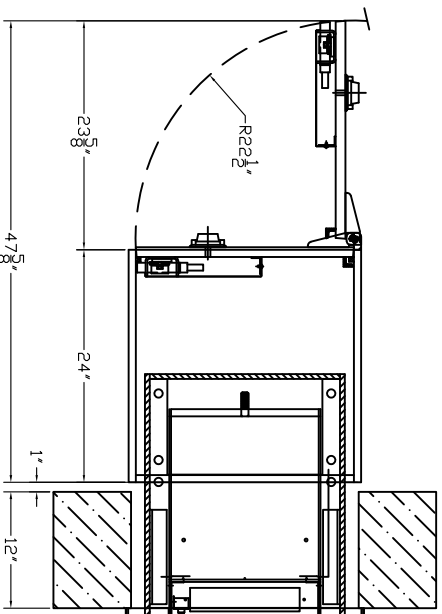


PLAN


- EQUIPMENT :
- 1.) 80UC HEAD WITH/5LB PULL ASSIST
 - 2.) SECURE STEEL HOUSING
 - 3.) 24 ADDITIONAL HEAD KEYS
 - 4.) TL-15 STEEL SAFE 23"H x 24"W x 24"D LEFT SWING
 - 5.) TWO ANCHOR HOLES IN SAFE
 - 6.) 35-50 HAMILTON/NL ELECTRONIC DEAD BOLT WITH ONE MANAGERS AND NINE USER TURN TO OPEN
 - 7.) HEAT SENSOR AND DOOR CONTACT
 - 8.) COLOR : CHARCOAL GRAY

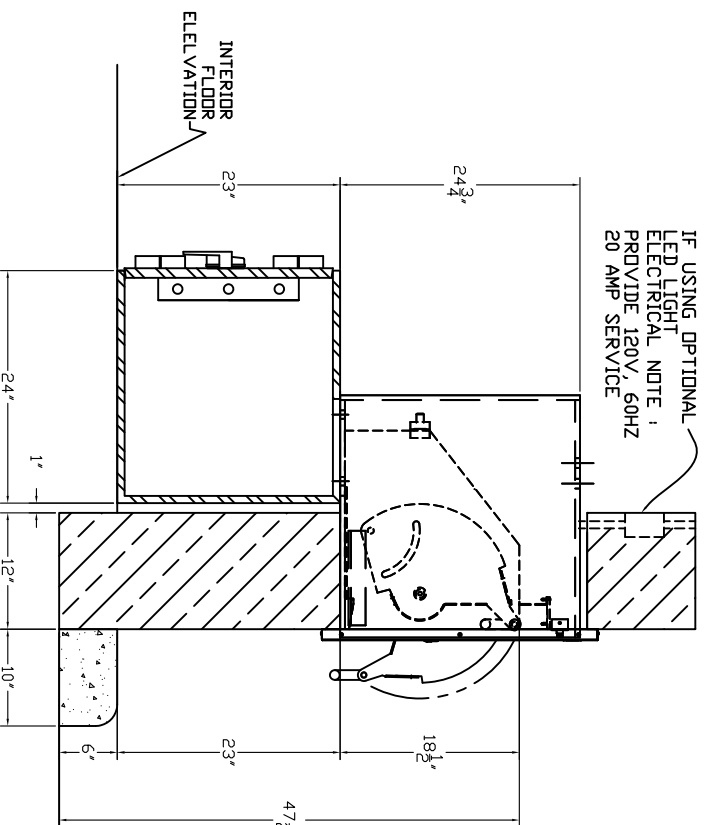

SECTION

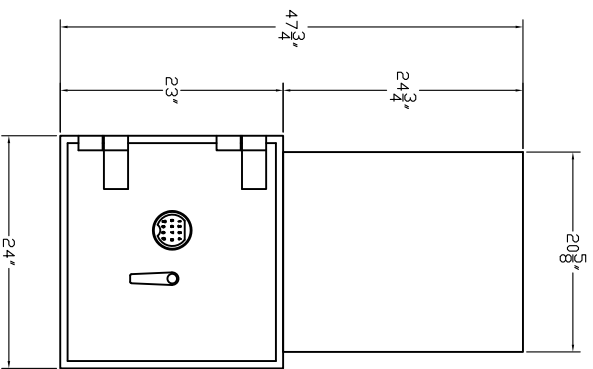

INTERIOR

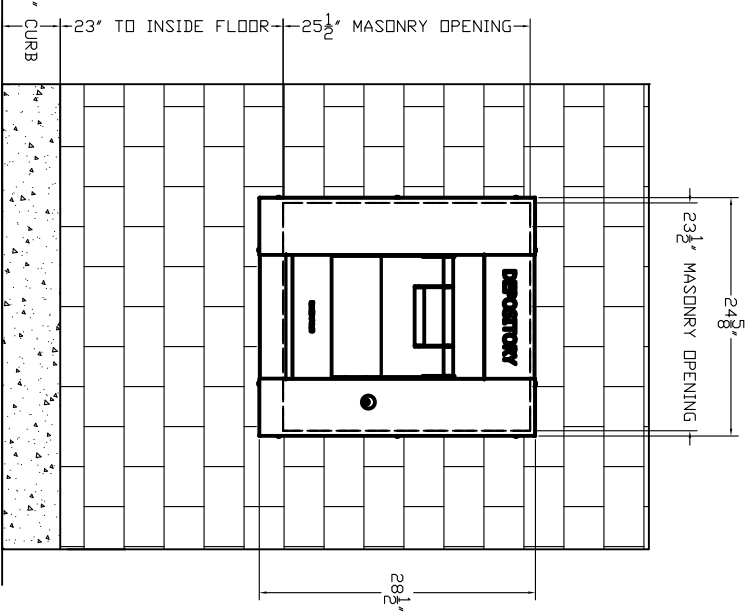

MASONRY DETAIL

EXTERIOR FLOOR ELEVATION

est. 1967 HAMILTON CUSTOM MADE SECURITY	PROPRIETARY AND CONFIDENTIAL THESE DRAWINGS ARE THE PROPERTY OF HAMILTON SAFE CO. AND SHALL NOT BE REPRODUCED/COPY/USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION	DESCRIPTION TL-15 Steel Receiving Safe With Secure Housing 23' Height x 24"W x 24"D UL Listed Left Swing Shown DRAWING/MODEL NUMBER 14-051L DATE 3/4/2021
---	---	--

ESTIMATED WEIGHT: 1,545LBS.