


| ITEM NO. | PART NUMBER | GAGE | DESCRIPTION | QTY. |
|----------|-------------|------------|----------------------------------|------|
| 1 | DD8-61-3 | 14 GA HRPO | TRAY POCKET BOTTOM PLATE | 1 |
| 2 | DD8-07-2-2 | 14 GA HRPO | Tray Pocket Right Side Plate | 1 |
| 3 | SSB44S | | 1/8" x.126-.187 Blind Rivet (SS) | 8 |
| 4 | DD8-83-1 | 7 GA SS | Door Guide Wear Track | 2 |
| 5 | DD8-07-1-2 | 14 GA HRPO | Tray Pocket Left Side Plate | 1 |
| 6 | 9541K8 | | Threaded-Stud Bumper | 1 |
| 7 | 90631A007 | | 6-32 Hex Nylon Lock Nut | 2 |
| 8 | MXT6C50/Z | | 6-32 x 1/2" PHILLIPS TRS HD SC | 4 |
| 9 | DD8-123 | 14 GA SS | SHOT GUARD, REAR DOOR | 1 |

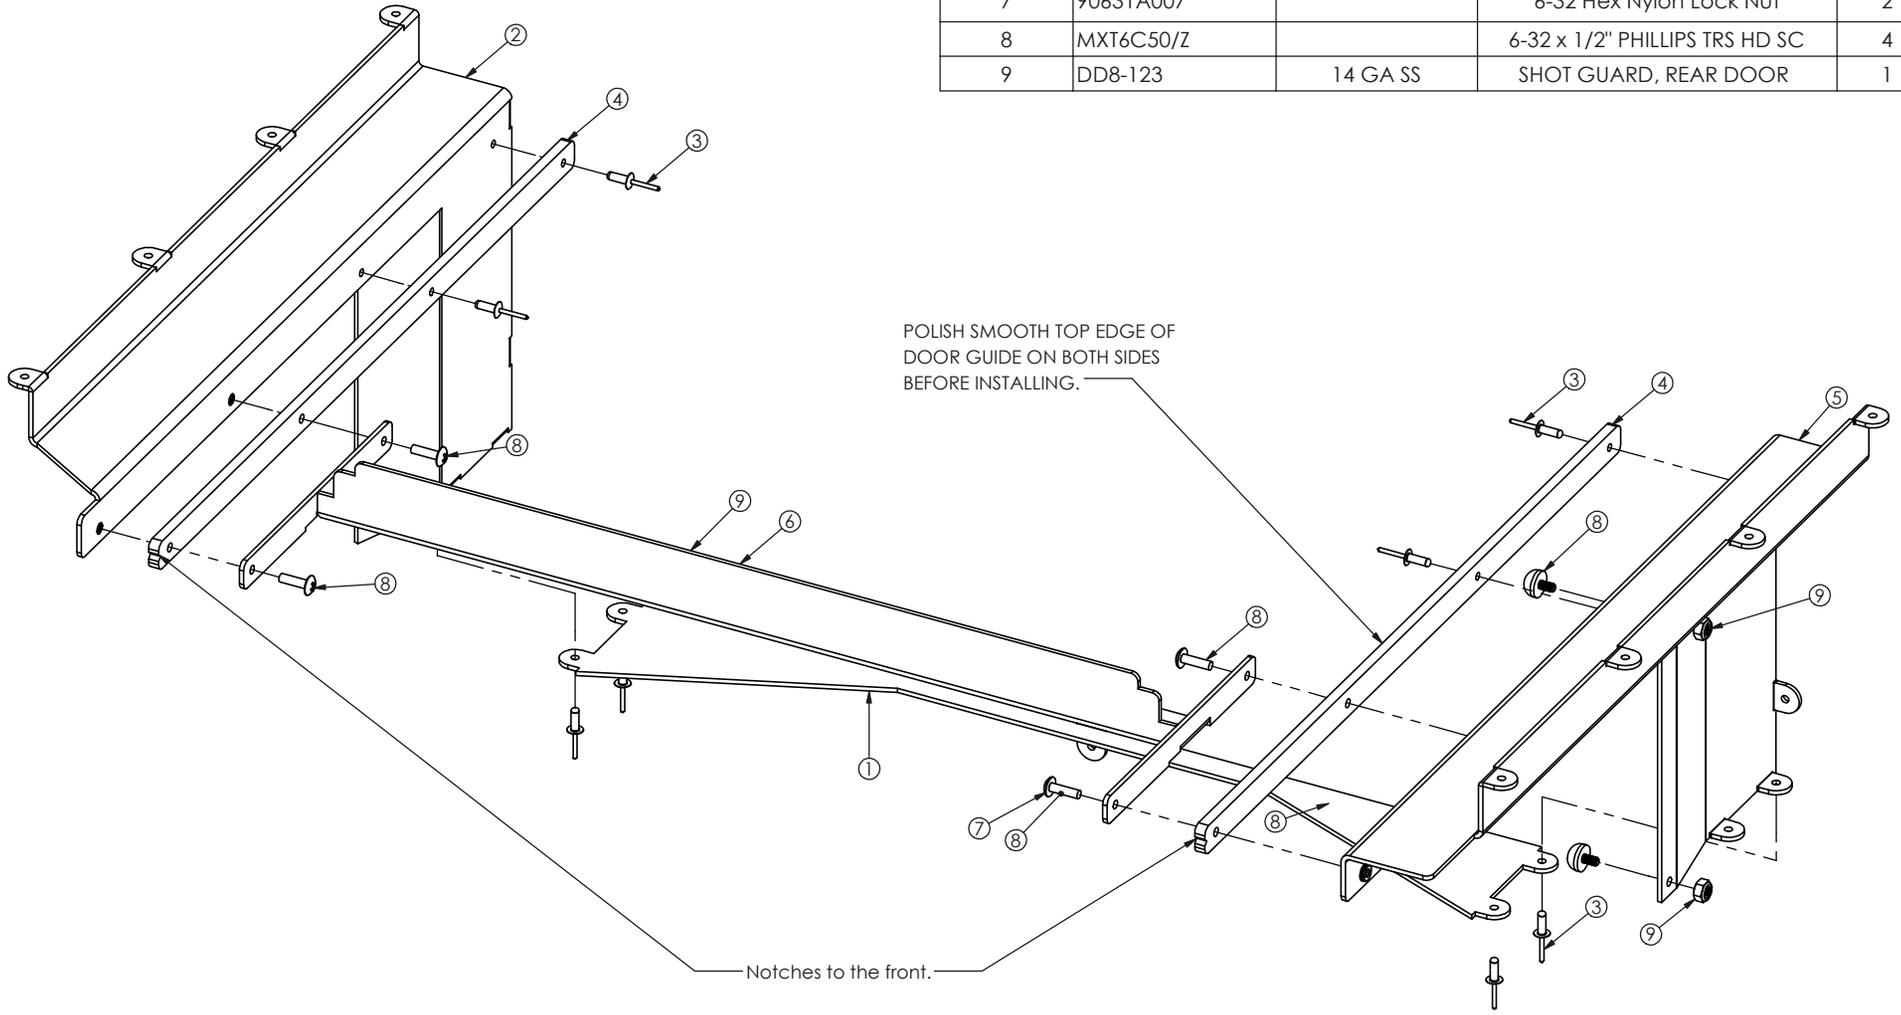

| Revision Table | | | |
|----------------|-----------------------------|---------|------|
| REV. | DESCRIPTION | DATE | INT. |
| A | 6-32 x 1/2" screw were 3/8. | 8/22/24 | DC |

| | | | | |
|---|--|------------|------------------------------|---------------|
| HAMILTON est. 1967 CUSTOM MADE SECURITY | PROPRIETARY AND CONFIDENTIAL THESE DRAWINGS ARE THE PROPERTY OF HAMILTON SAFE CO. AND SHALL NOT BE REPRODUCED, COPIED, USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION | | TITLE Pocket Sub-Assembly | |
| | All Weld Notes Comply With AWS A2.4-98 Standards | | PART NUMBER DD8-SA-009-2 | REVISION A |
| DRAWN BY DC | DATE 8/22/24 | CHECKED BY | DATE | REVISION |